


DTW.55-A30-V20-R2

H 2.17" - 55.00 mm - **30°**




42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

16.75
TONS / FT

55.00
TONS / M

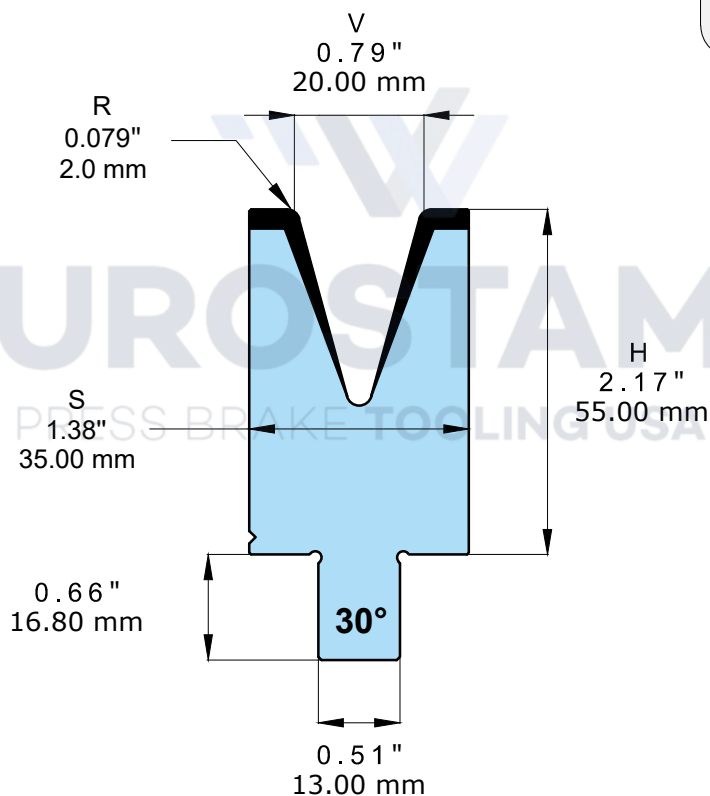

V = 0.79" / 20.00 mm / 30°

332.650.02 - SC3 20.28" / 515 mm 15.87 lbs / 7.20 kg

332.650.02 - SF3 21.65" / 550 mm 16.98 lbs / 7.70 kg