
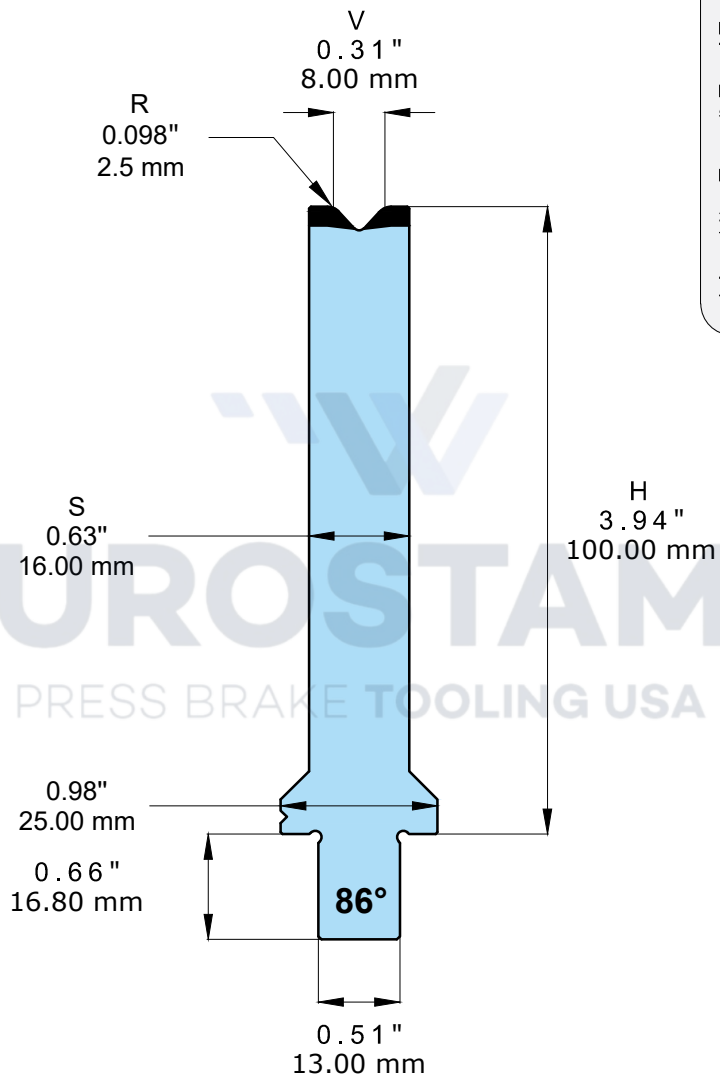


DTW.100-A86-V8-R2.5

H 3.94" - 100.00 mm - **86°**



42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

36.55
TONS / FT

120.00
TONS / M

V = 0.31" / 8.00 mm / 86°

832.716.02 - SC3 20.28" / 515 mm 16.76 lbs / 7.60 kg

832.716.02 - SF3 21.65" / 550 mm 17.86 lbs / 8.10 kg