
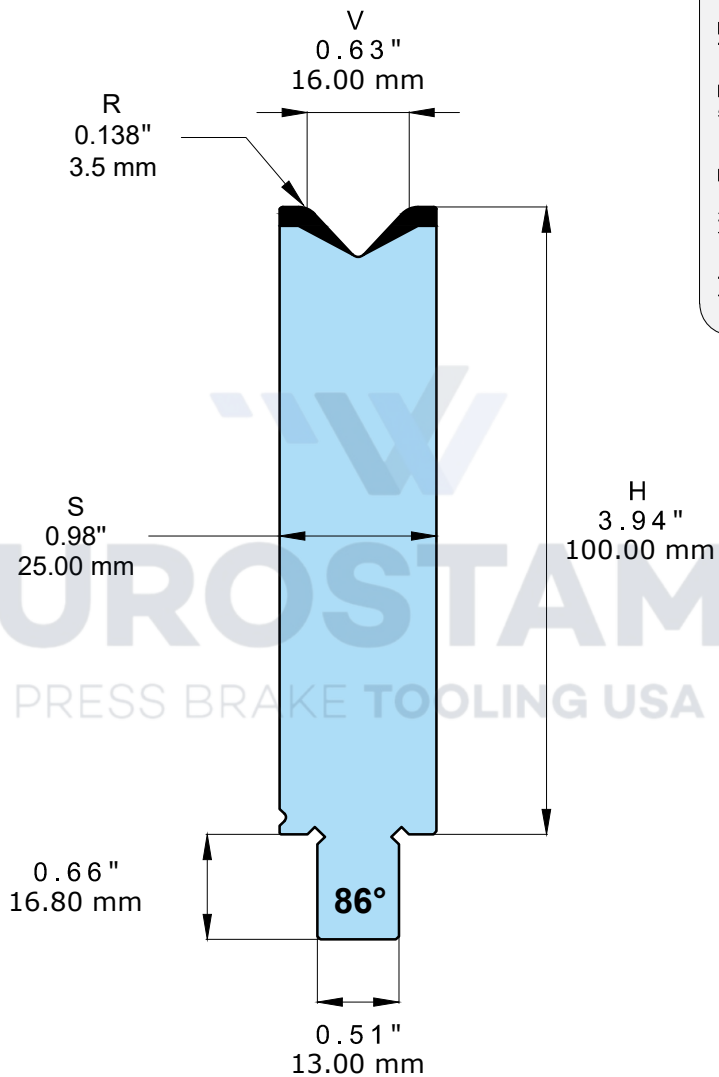


DTW.100-A86-V16-R3.5

H 3.94" - 100.00 mm - **86°**



42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

36.55
TONS / FT

120.00
TONS / M

V = 0.63" / 16.00 mm / 86°

832.746.02 - SC3 20.28" / 515 mm 23.59 lbs / 10.70 kg

832.746.02 - SF3 21.65" / 550 mm 24.13 lbs / 11.40 kg