



DTW.100-A86-V20-R4

H 3.94" - 100.00 mm - **86°**



Type SF3

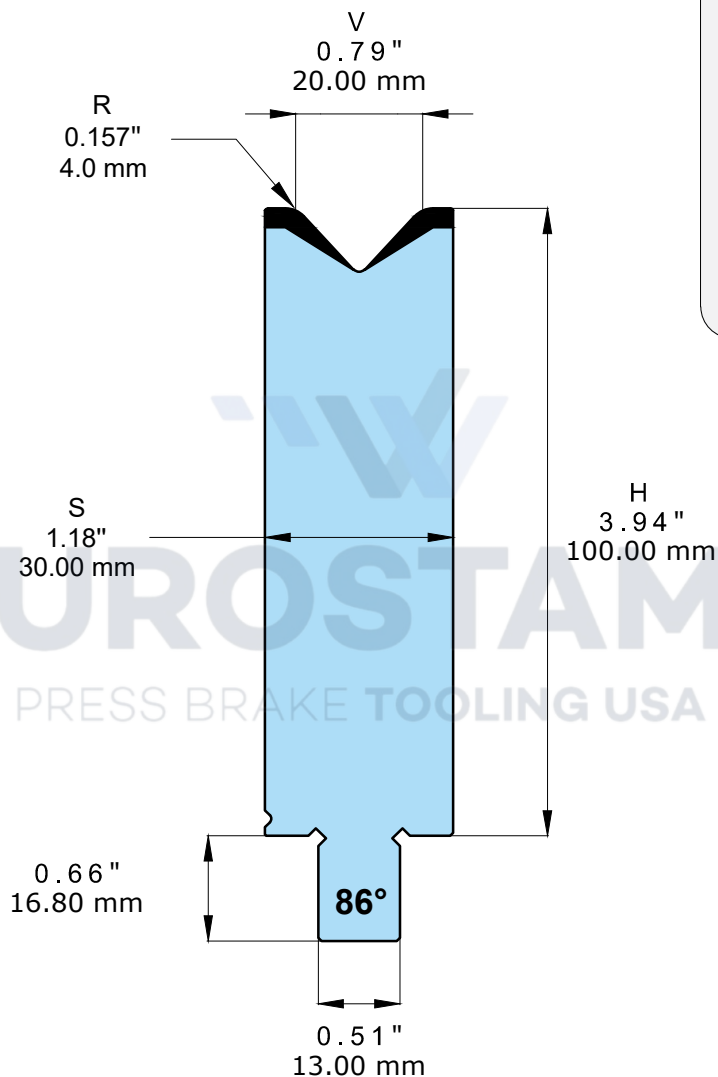

42CrMo4

Bonificato
Temperato

Edge
55-60 HRC

MAX LOAD

36.55
TONS / FT

120.00
TONS / M

V = 0.79" / 20.00 mm / 86°

832.756.02 - SC3 20.28" / 515 mm 27.78 lbs / 12.60 kg

832.756.02 - SF3 21.65" / 550 mm 16.98 lbs / 13.40 kg