
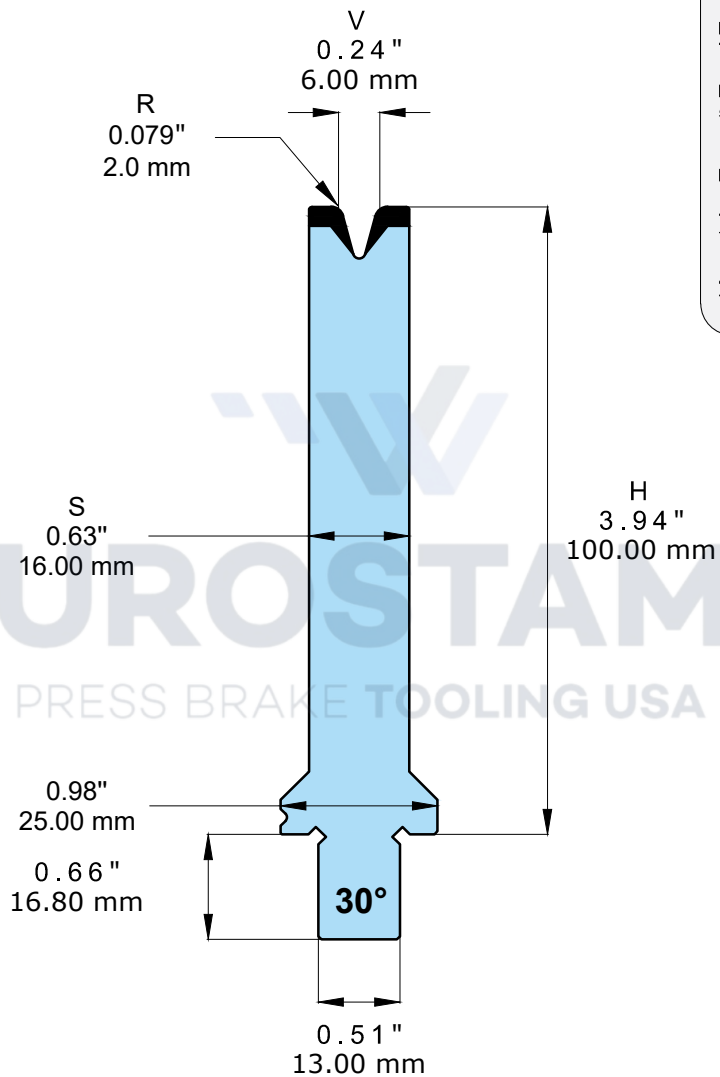


DTW.100-A30-V6-R2

H 3.94" - 100.00 mm - **30°**



42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

12.15
TONS / FT

40.00
TONS / M

V = 0.24" / 6.00 mm / 30°

332.800.02 - SC3 20.28" / 515 mm 16.53 lbs / 7.50 kg

332.800.02 - SF3 21.65" / 550 mm 17.64 lbs / 8.00 kg