
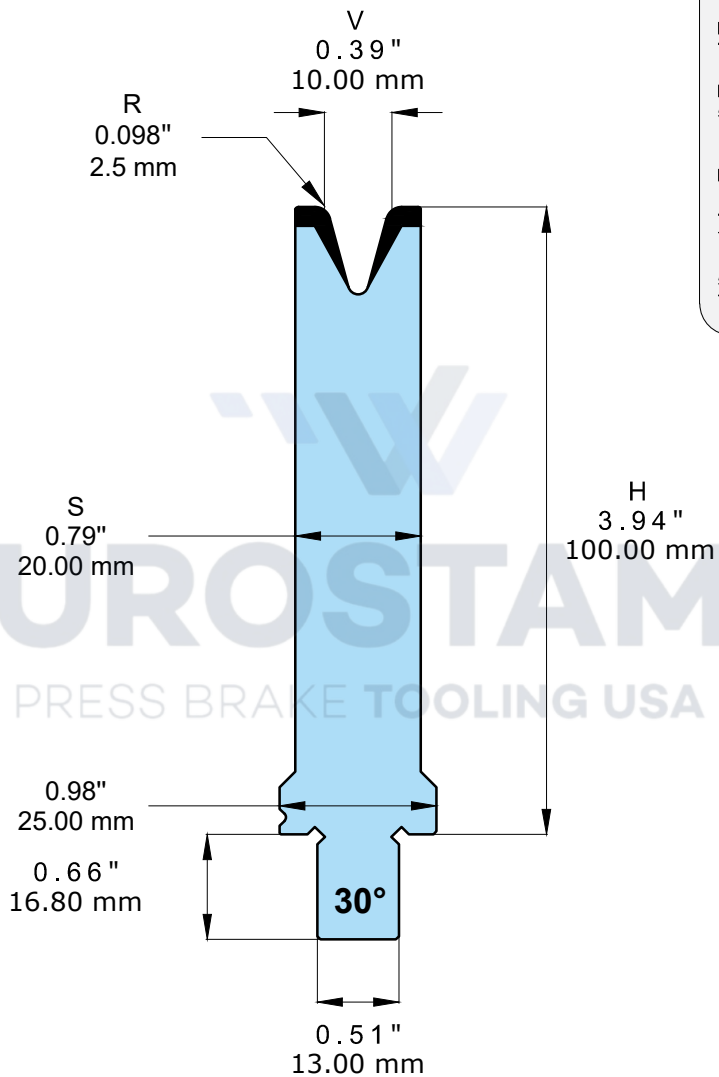


DTW.100-A30-V10-R2.5

H 3.94" - 100.00 mm - **30°**



42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

16.75
TONS / FT

55.00
TONS / M

V = 0.39" / 10.00 mm / 30°

332.820.02 - SC3 20.28" / 515 mm 19.40 lbs / 8.80 kg

332.820.02 - SF3 21.65" / 550 mm 20.72 lbs / 9.40 kg