
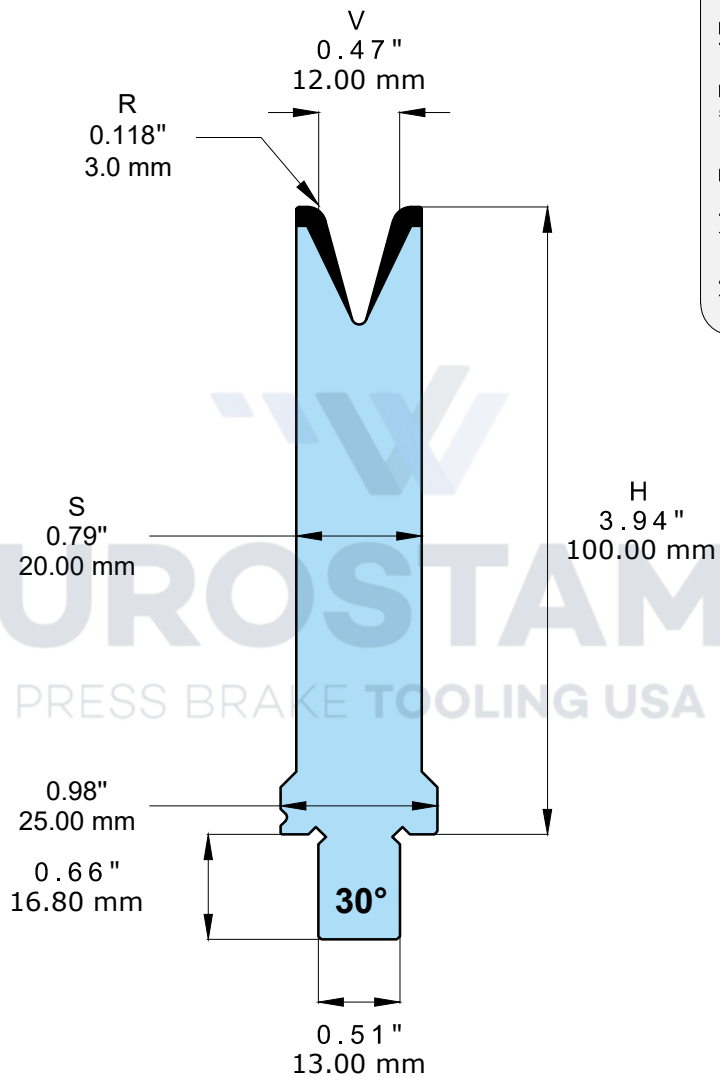


DTW.100-A30-V12-R3

H 3.94" - 100.00 mm - **30°**



42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

12.15
TONS / FT

40.00
TONS / M

V = 0.47" / 12.00 mm / 30°

332.830.02 - SC3 20.28" / 515 mm 18.96 lbs / 8.60 kg

332.830.02 - SF3 21.65" / 550 mm 20.28 lbs / 9.20 kg