



DTW.100-A30-V16-R3.5

H 3.94" - 100.00 mm - **30°**



Type SF3

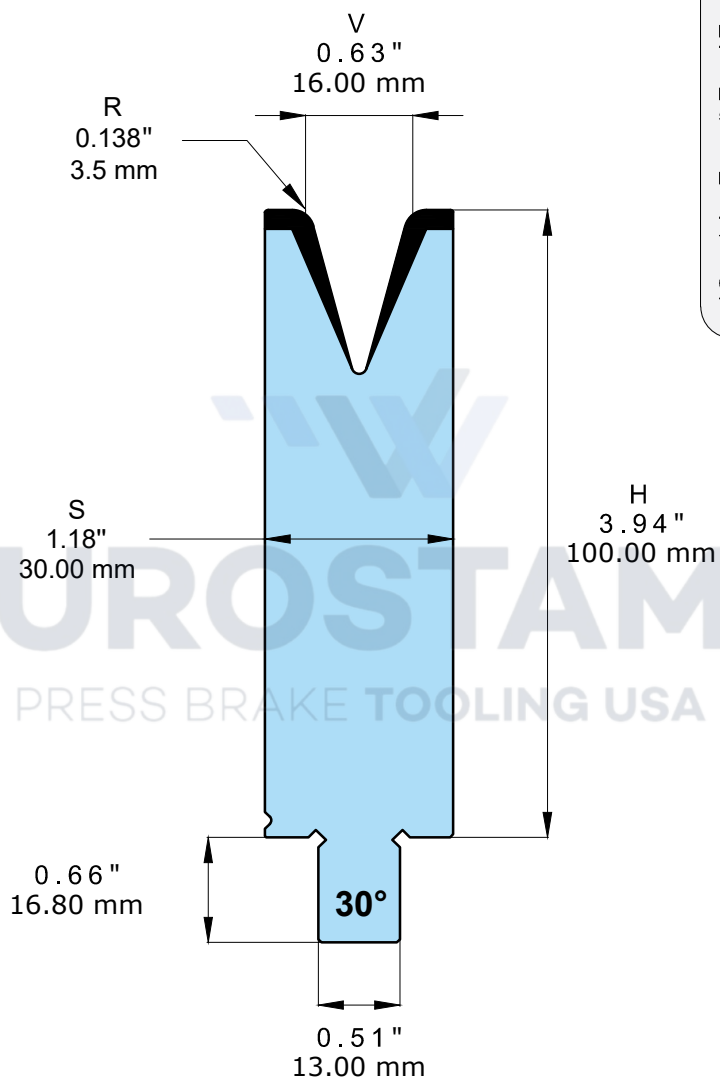

42CrMo4

Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

18.25
TONS / FT

60.00
TONS / M

V = 0.63" / 16.00 mm / 30°

332.840.02 - SC3 20.28" / 515 mm 26.46 lbs / 12.00 kg

332.840.02 - SF3 21.65" / 550 mm 28.44 lbs / 12.90 kg