
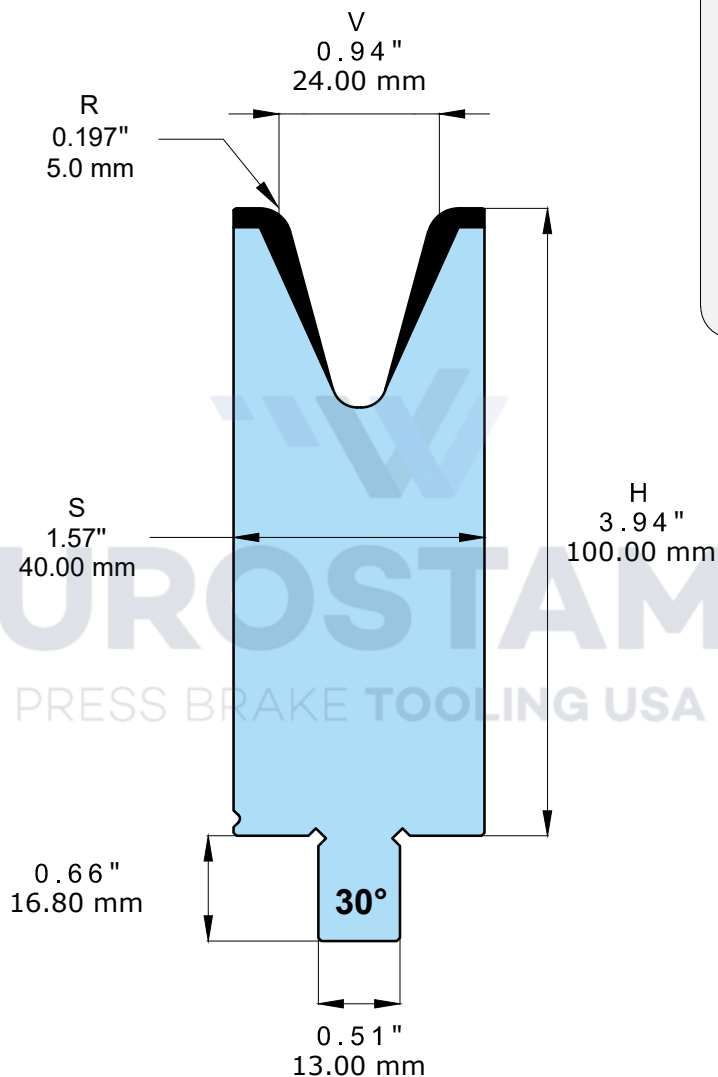


DTW.100-A30-V24-R5

H 3.94" - 100.00 mm - **30°**



42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

13.70
TONS / FT

45.00
TONS / M

V = 0.94" / 24.00 mm / 30°

332.860.02 - SC3 20.28" / 515 mm 33.29 lbs / 15.10 kg

332.860.02 - SF3 21.65" / 550 mm 35.49 lbs / 16.10 kg