


DTT.100-A86-V6-R06-Cr

H 3.94" - 100.00 mm - **86°**




42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

30.50
TONS / FT

100.00
TONS / M

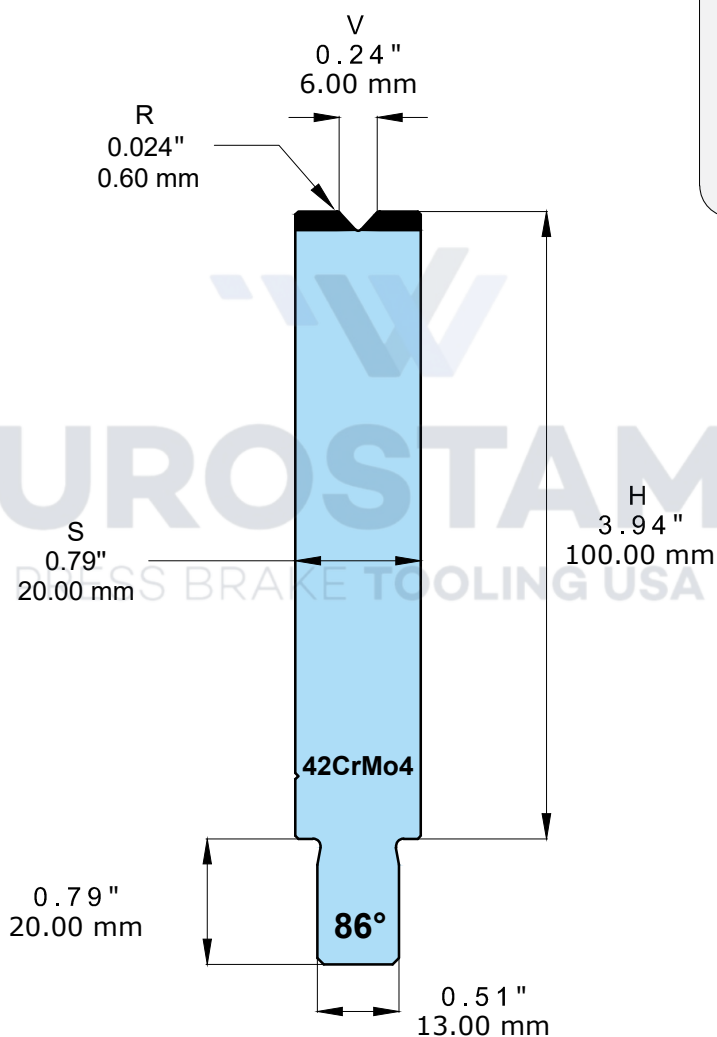

V = 0.24" / 6.00 mm / 86°

832.006.02 - SC2 19.69" / 500 mm 19.40 lbs / 8.80 kg

832.006.02 - SF5 21.65" / 550 mm 21.38 lbs / 9.70 kg