


DTT.100-A86-V12-R1-Cr

H 3.94" - 100.00 mm - **86°**




42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

30.50
TONS / FT

100.00
TONS / M

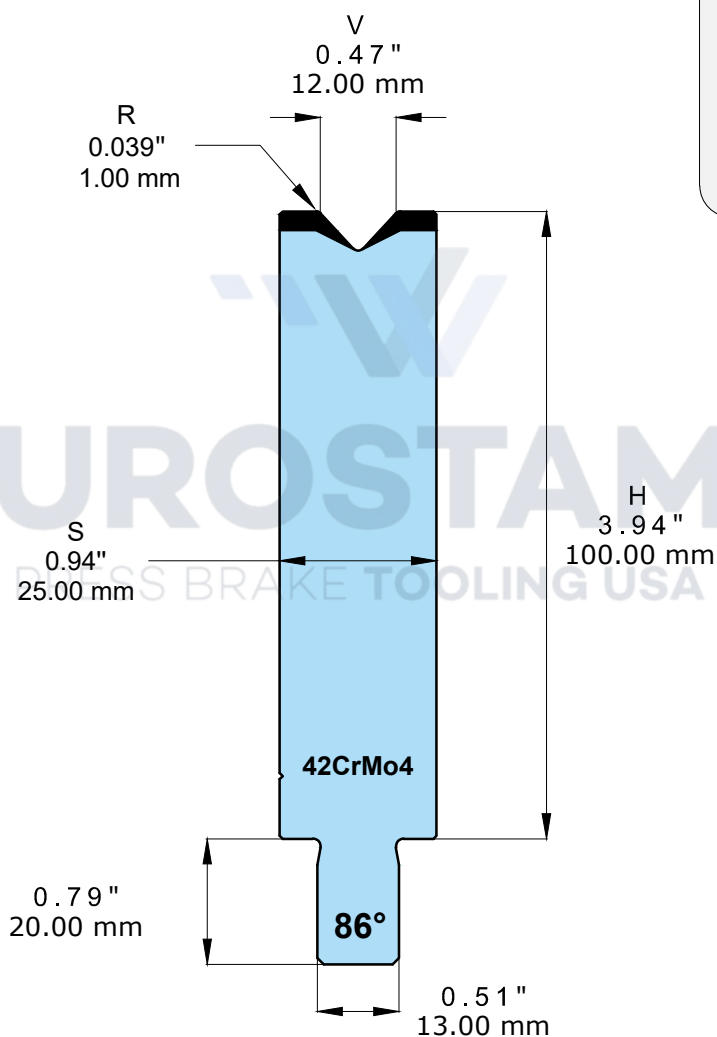

V = 0.47" / 12.00 mm / 86°

832.036.02 - SC2 19.69" / 500 mm 23.37 lbs / 10.60 kg

832.036.02 - SF5 21.65" / 550 mm 25.79 lbs / 11.70 kg