


DTT.100-A86-V20-R2-Cr

H 3.94" - 100.00 mm - **86°**




42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

30.50
TONS / FT

100.00
TONS / M

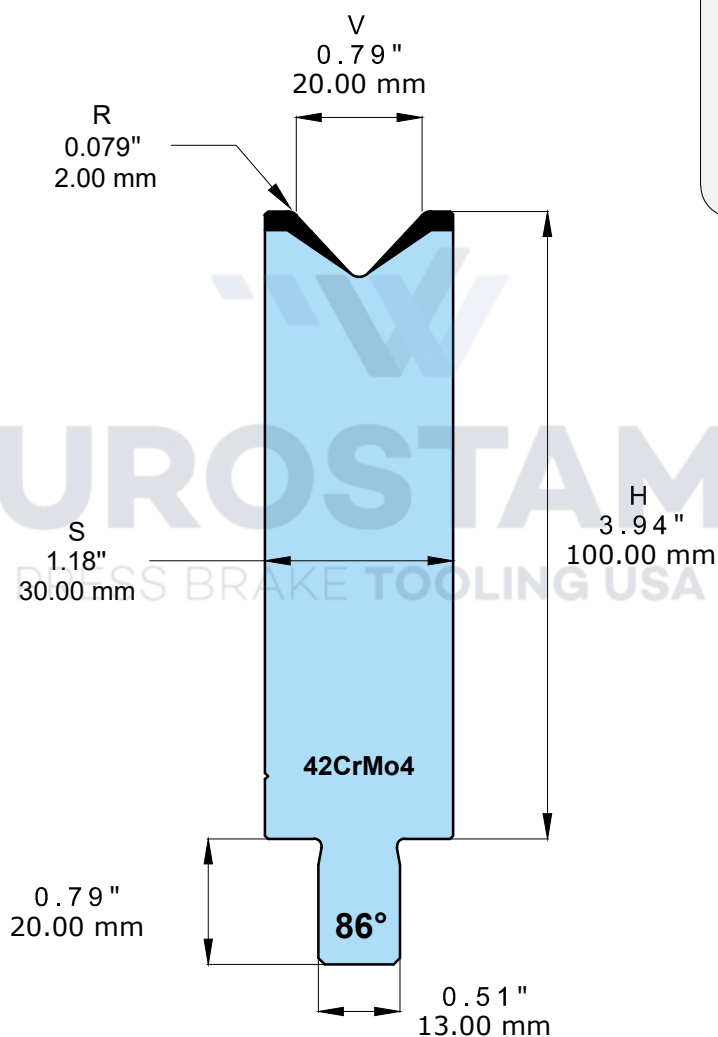

V = 0.79" / 20.00 mm / 86°

832.056.02 - SC2 19.69" / 500 mm 27.12 lbs / 12.30 kg

832.056.02 - SF5 21.65" / 550 mm 29.76 lbs / 13.50 kg