


DTT.100-A86-V24-R2.5-Cr

H 3.94" - 100.00 mm - **86°**



Type SF5

42CrMo4


**Bonificato
Tempered**

Edge
55-60 HRC

MAX LOAD

30.50
TONS / FT

100.00
TONS / M

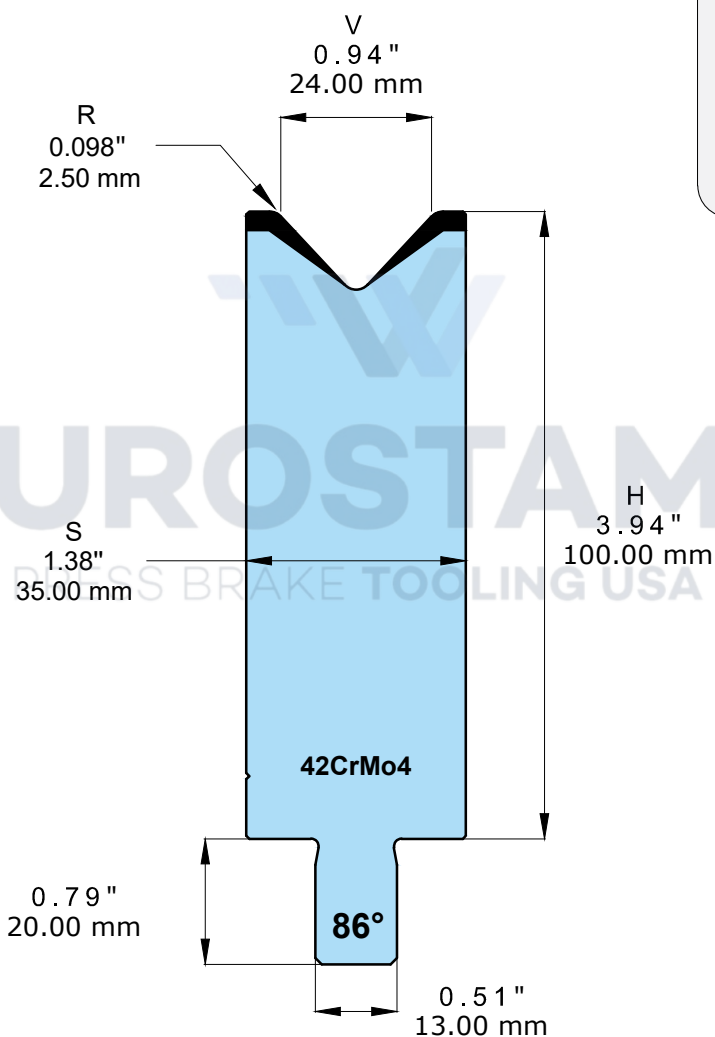

V = 0.94" / 24.00 mm / 86°

832.156.02 - SC2 19.69" / 500 mm 30.86 lbs / 14.00 kg

832.156.02 - SF5 21.65" / 550 mm 33.95 lbs / 15.40 kg