


DTT.100-A86-V30-R3-Cr

H 3.94" - 100.00 mm - **86°**




42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

30.50
TONS / FT

100.00
TONS / M

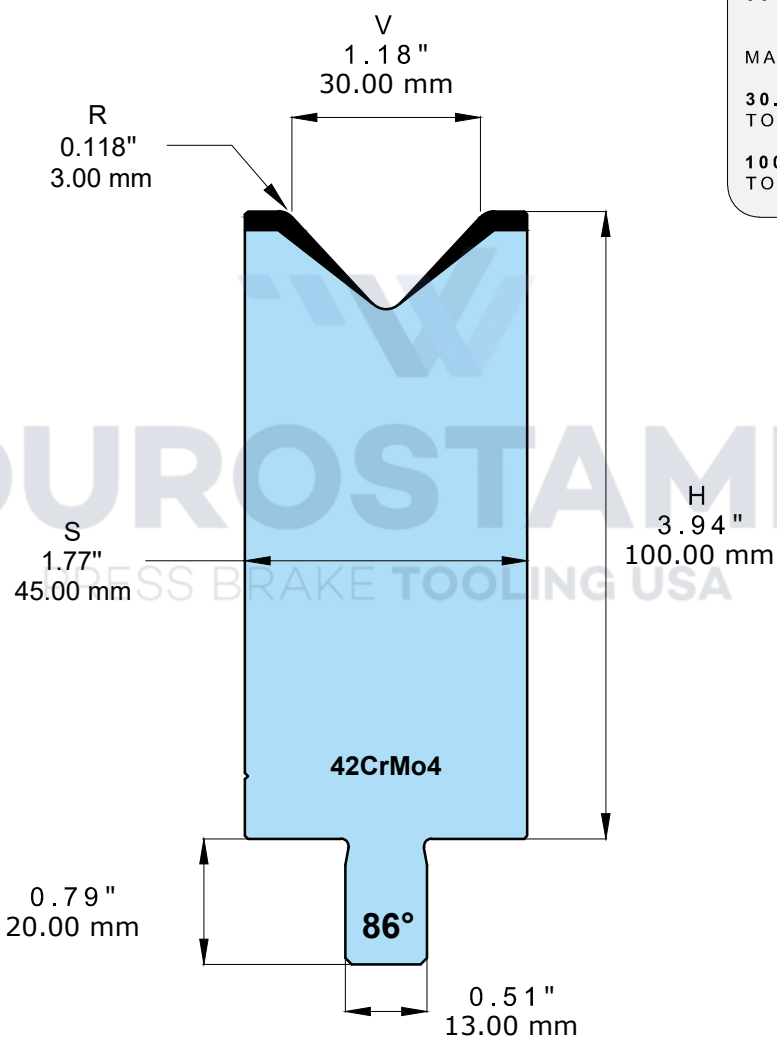

V = 1.18" / 30.00 mm / 86°

832.166.02 - SC2 19.69" / 500 mm 38.80 lbs / 17.60 kg

832.166.02 - SF5 21.65" / 550 mm 42.55 lbs / 19.30 kg