


DTT.100-A86-V40-R3-Cr

H 3.94" - 100.00 mm - **86°**



42CrMo4


**Bonificato
Tempered**

Edge
55-60 HRC

MAX LOAD

**30.50
TONS / FT**

**100.00
TONS / M**

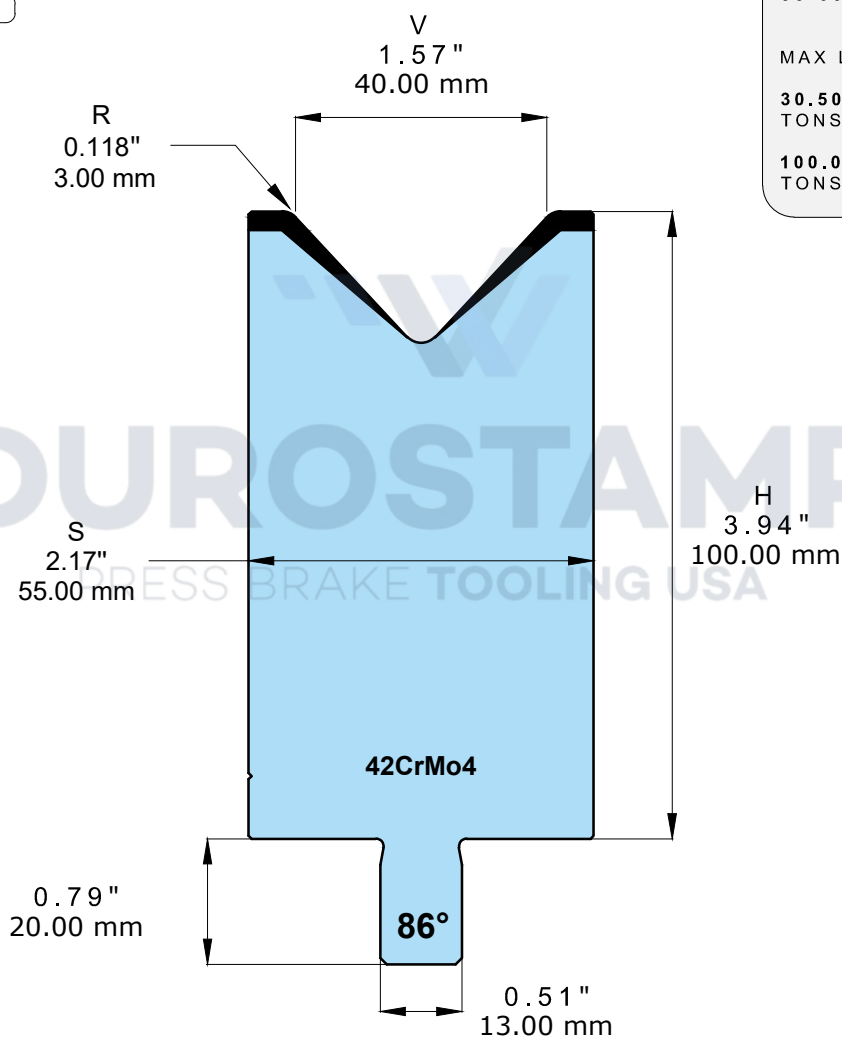

V = 1.57" / 40.00 mm / 86°

832.176.02 - SC2 19.69" / 500 mm 45.64 lbs / 20.70 kg

832.176.02 - SF5 21.65" / 550 mm 50.27 lbs / 22.80 kg