


DTT.100-A86-V50-R3-Cr

H 3.94" - 100.00 mm - **86°**



Type SF5

42CrMo4


**Bonificato
Tempered**

Edge
55-60 HRC

MAX LOAD

**30.50
TONS / FT**

**100.00
TONS / M**

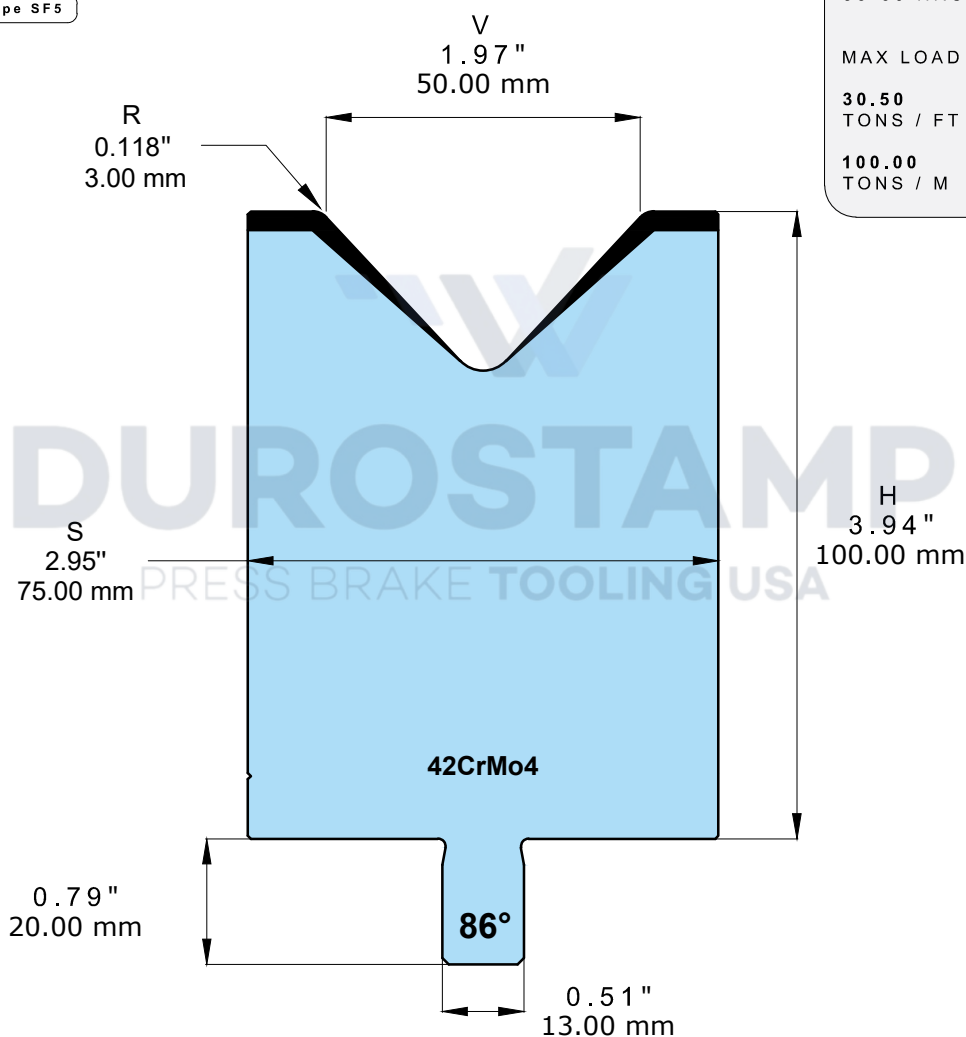

V = 1.97" / 50.00 mm / 86°

832.186.02 - SC2 19.69" / 500 mm 60.85 lbs / 27.60 kg

832.186.02 - SF5 21.65" / 550 mm 66.80 lbs / 30.30 kg