


DTT.100-A84-V10-R1-Cr

H 3.94" - 100.00 mm - **84°**




42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

30.50
TONS / FT

100.00
TONS / M

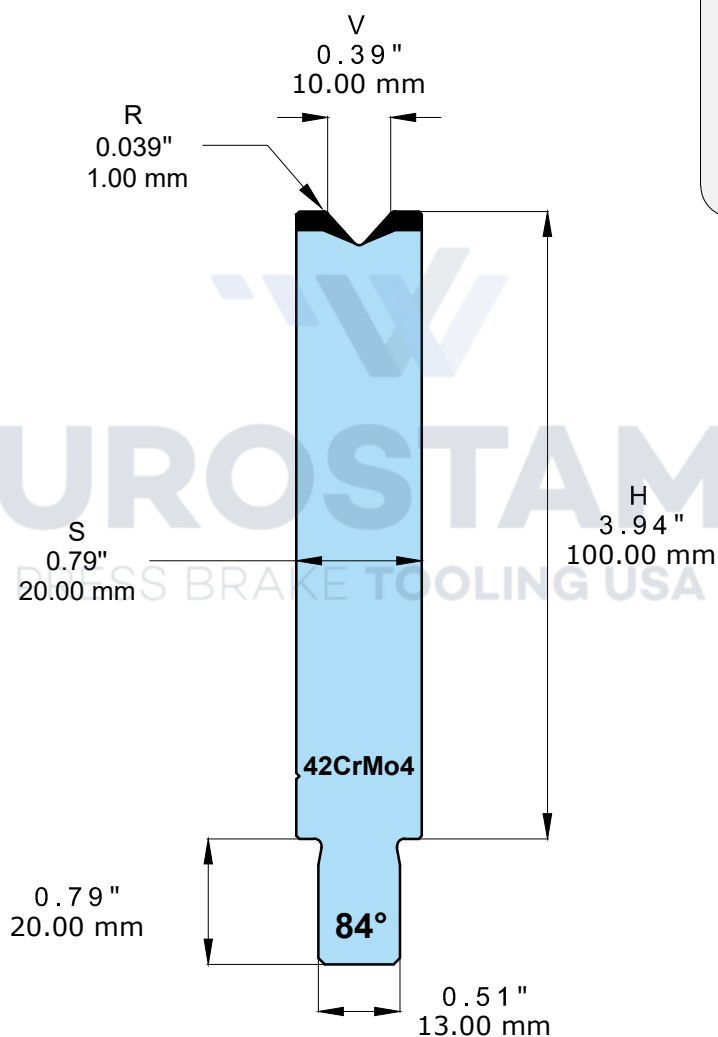

V = 0.39" / 10.00 mm / 84°

832.274.02 - SC2 19.69" / 500 mm 19.18 lbs / 8.70 kg

832.274.02 - SF5 21.65" / 550 mm 21.16 lbs / 9.60 kg