


DTT.100-A84-V14-R1.6-Cr

H 3.94" - 100.00 mm - **84°**




42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

27.45
TONS / FT

90.00
TONS / M

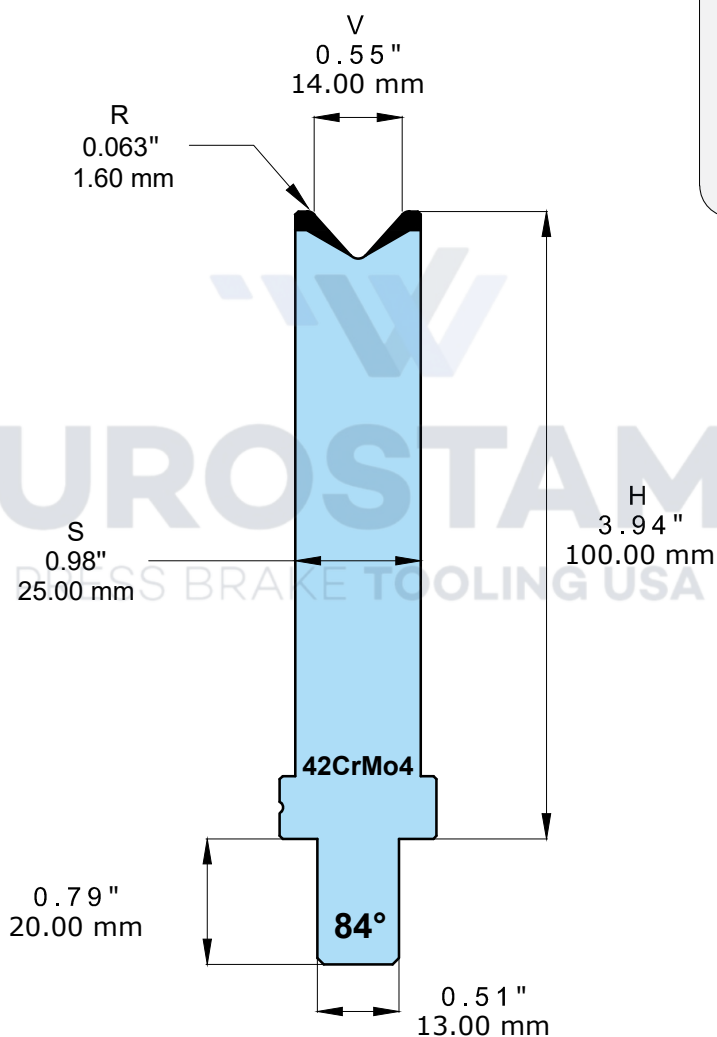

V = 0.55" / 14.00 mm / 84°

832.444.02 - SC2 19.69" / 500 mm 19.40 lbs / 8.80 kg

832.444.02 - SF5 21.65" / 550 mm 21.38 lbs / 9.70 kg