


DTT.100-A84-V16-R1.6-Cr

H 3.94" - 100.00 mm - **84°**



Type SF5

42CrMo4


**Bonificato
Tempered**

Edge
55-60 HRC

MAX LOAD

30.50
TONS / FT

100.00
TONS / M

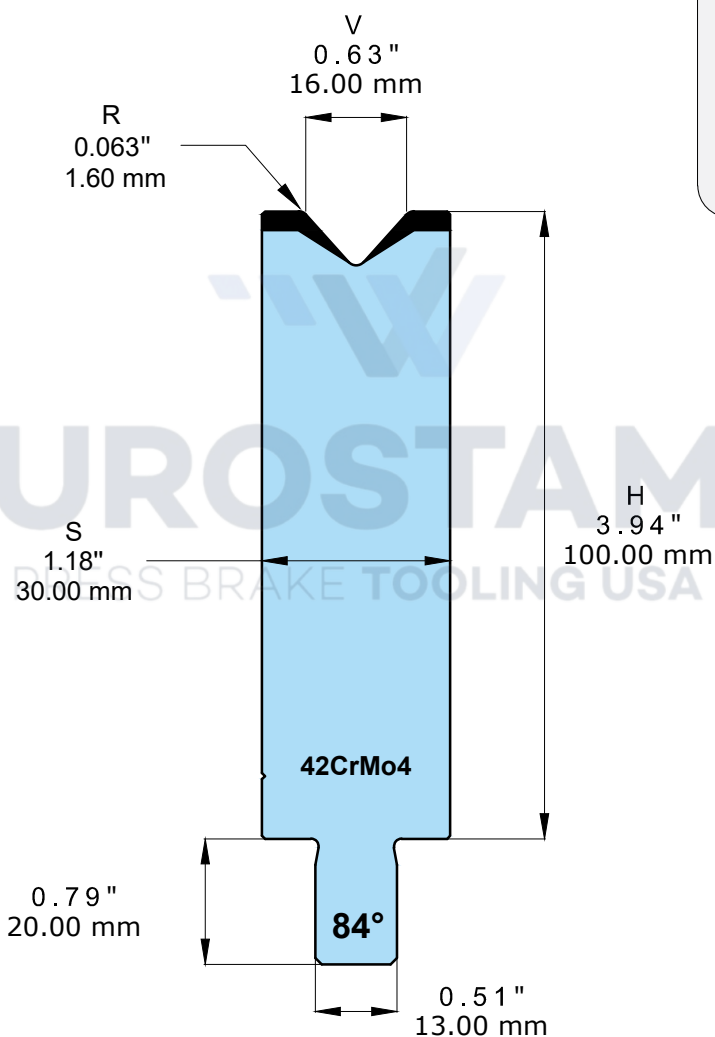

V = 0.63" / 16.00 mm / 84°

832.294.02 - SC2 19.69" / 500 mm 27.34 lbs / 12.40 kg

832.294.02 - SF5 21.65" / 550 mm 30.20 lbs / 13.70 kg