


DTT.100-A80-V30-R5-Cr

H 3.94" - 100.00 mm - **80°**




42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

36.60
TONS / FT

120.00
TONS / M

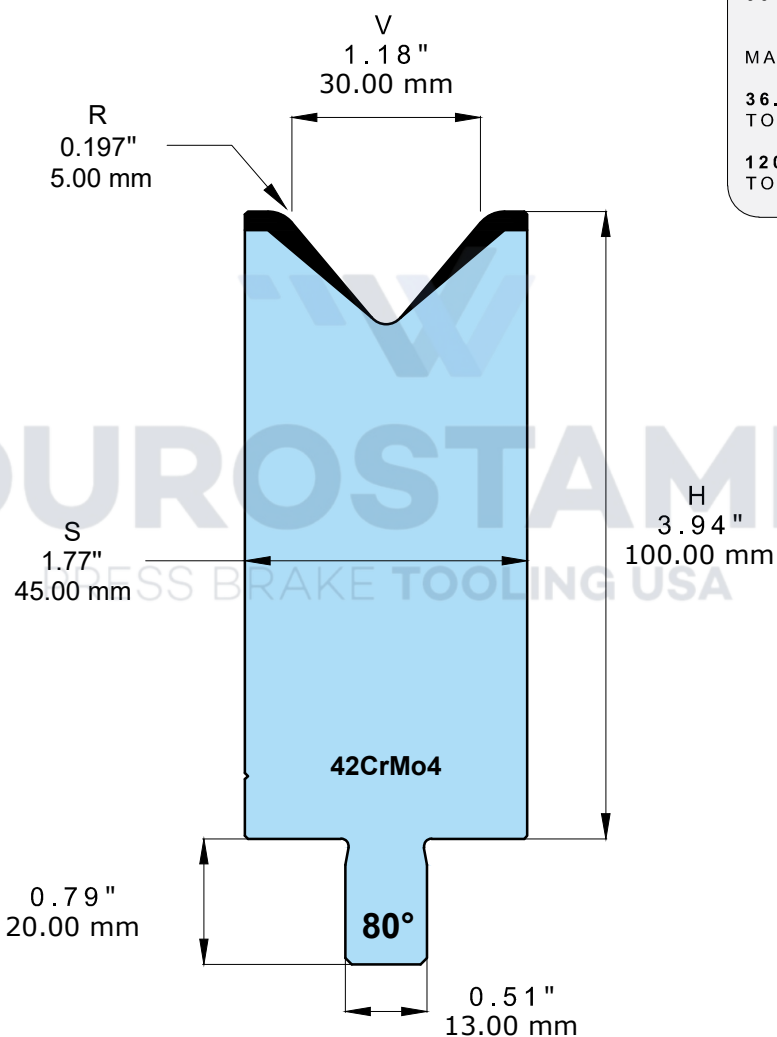

V = 1.18" / 30.00 mm / 80°

832.320.02 - SC2 19.69" / 500 mm 38.36 lbs / 17.40 kg

832.320.02 - SF5 21.65" / 550 mm 42.11 lbs / 19.10 kg