


DTT.100-A80-V40-R5-Cr

H 3.94" - 100.00 mm - **80°**



Type SF5

42CrMo4


**Bonificato
Tempered**

Edge
55-60 HRC

MAX LOAD

45.75
TONS / FT

150.00
TONS / M

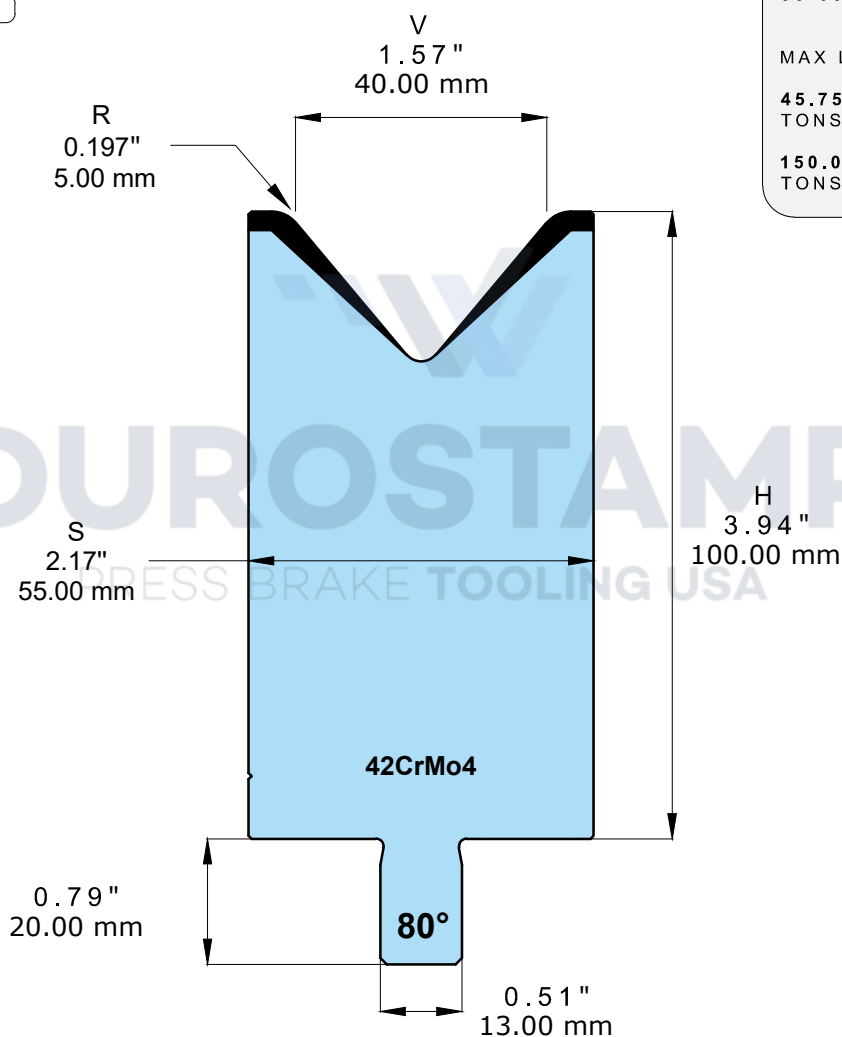

V = 1.57" / 40.00 mm / 80°

832.330.02 - SC2 19.69" / 500 mm 44.97 lbs / 20.40 kg

832.330.02 - SF5 21.65" / 550 mm 49.38 lbs / 22.40 kg