


DTT.100-A80-V50-R5-Cr

H 3.94" - 100.00 mm - **80°**



Type SF5

42CrMo4


**Bonificato
Temperato**

Edge
55-60 HRC

MAX LOAD

45.75
TONS / FT

150.00
TONS / M

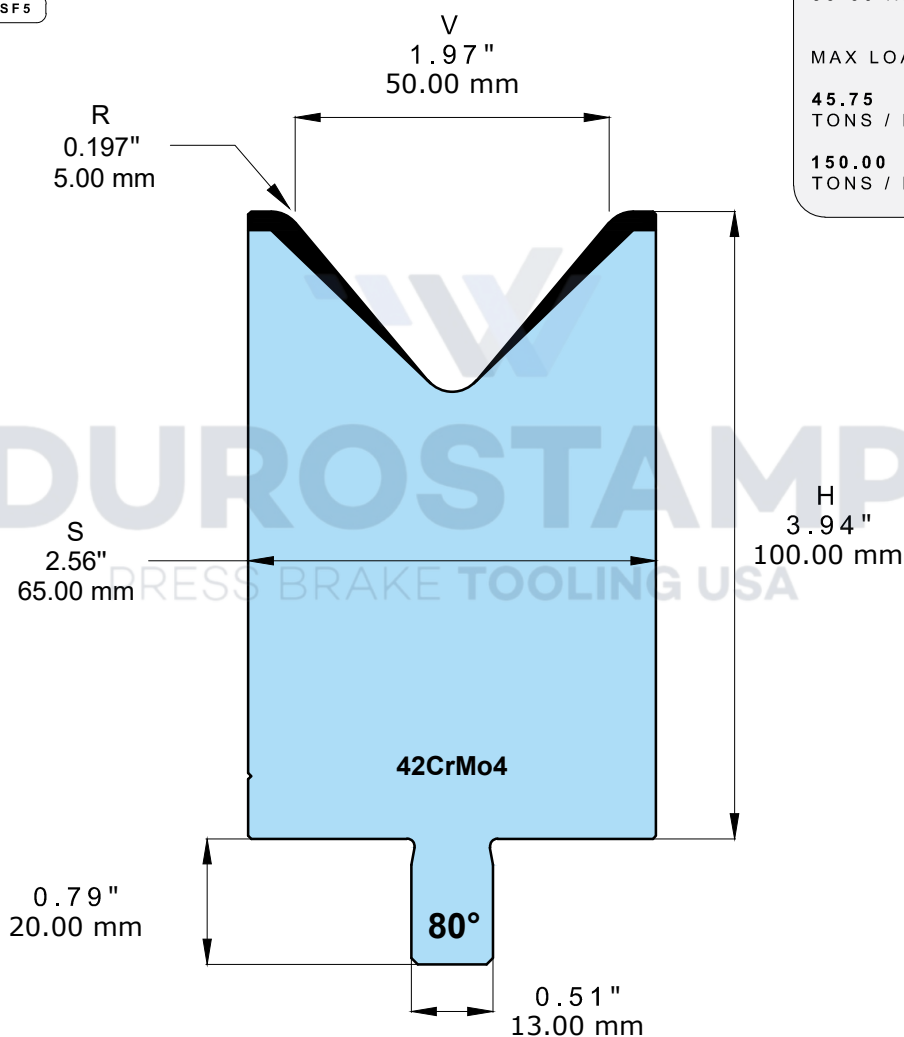

V = 1.97" / 50.00 mm / 80°

832.340.02 - SC2 19.69" / 500 mm 51.15 lbs / 23.20 kg

832.340.02 - SF5 21.65" / 550 mm 56.22 lbs / 25.50 kg