


DTT.100-A30-V6-R06-Cr

H 3.94" - 100.00 mm - **30°**




42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

18.25
TONS / FT

60.00
TONS / M

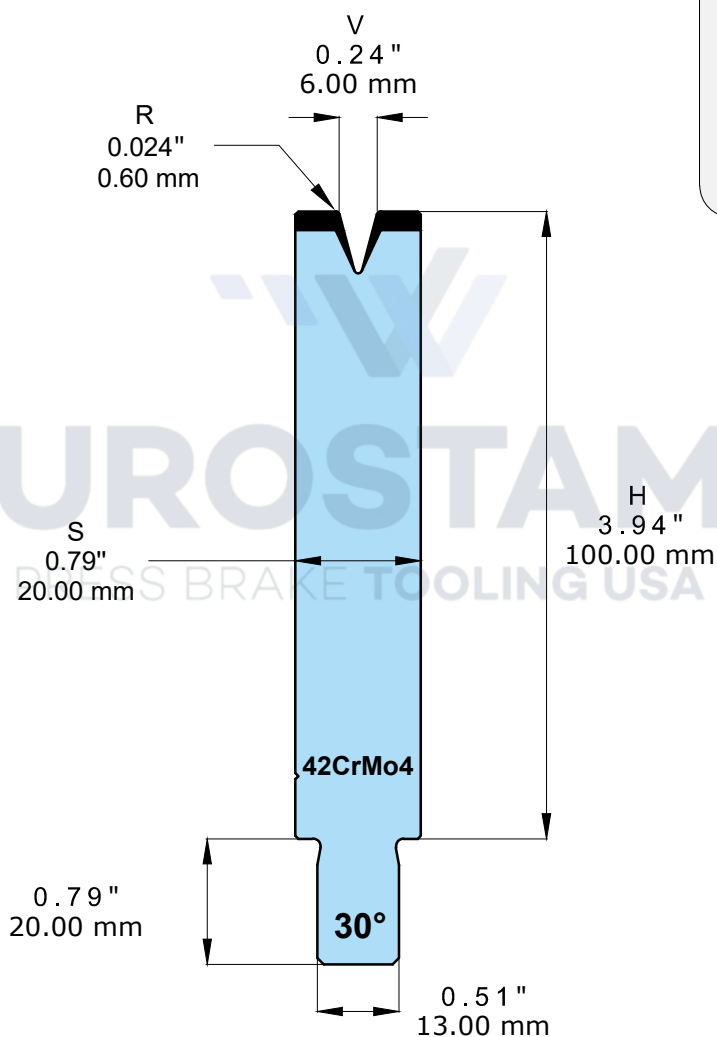

V = 0.24" / 6.00 mm / 30°

332.060.02 - SC2 19.69" / 500 mm 19.18 lbs / 8.70 kg

332.060.02 - SF5 21.65" / 550 mm 21.16 lbs / 9.60 kg