


DTT.100-A30-V16-R1.6-Cr

H 3.94" - 100.00 mm - **30°**



Type SF5

42CrMo4


**Bonificato
Tempered**

Edge
55-60 HRC

MAX LOAD

19.80
TONS / FT

65.00
TONS / M

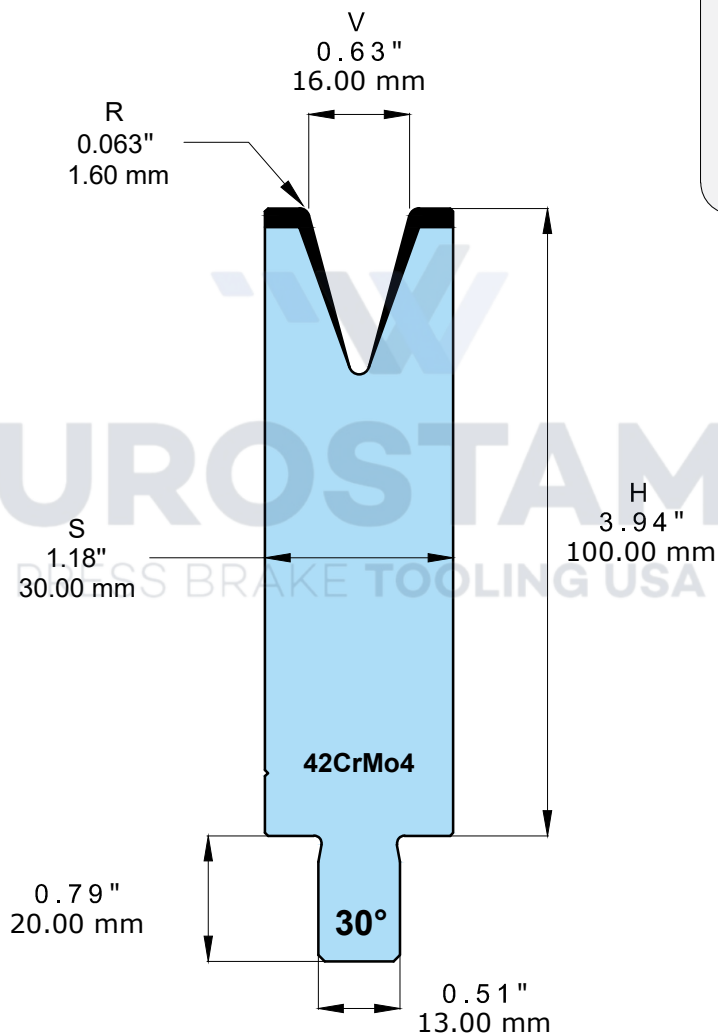

V = 0.63" / 16.00 mm / 30°

332.100.02 - SC2 19.69" / 500 mm 26.01 lbs / 11.80 kg

332.100.02 - SF5 21.65" / 550 mm 28.44 lbs / 12.90 kg