


DTT.100-A30-V20-R2-Cr

H 3.94" - 100.00 mm - **30°**




42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

15.25
TONS / FT

50.00
TONS / M

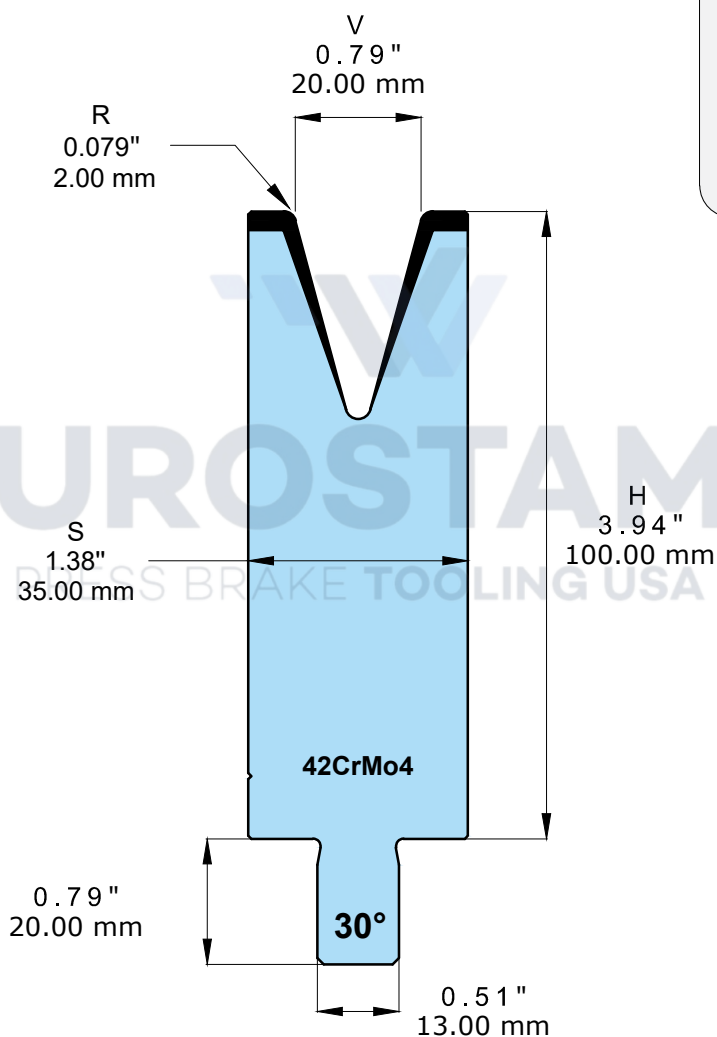

V = 0.79" / 20.00 mm / 30°

332.110.02 - SC2 19.69" / 500 mm 29.10 lbs / 13.20 kg

332.110.02 - SF5 21.65" / 550 mm 31.75 lbs / 14.40 kg