


DTT.100-A30-V24-R2.5-Cr

H 3.94" - 100.00 mm - **30°**



42CrMo4


**Bonificato
Tempered**

Edge
55-60 HRC

MAX LOAD

16.75
TONS / FT

55.00
TONS / M

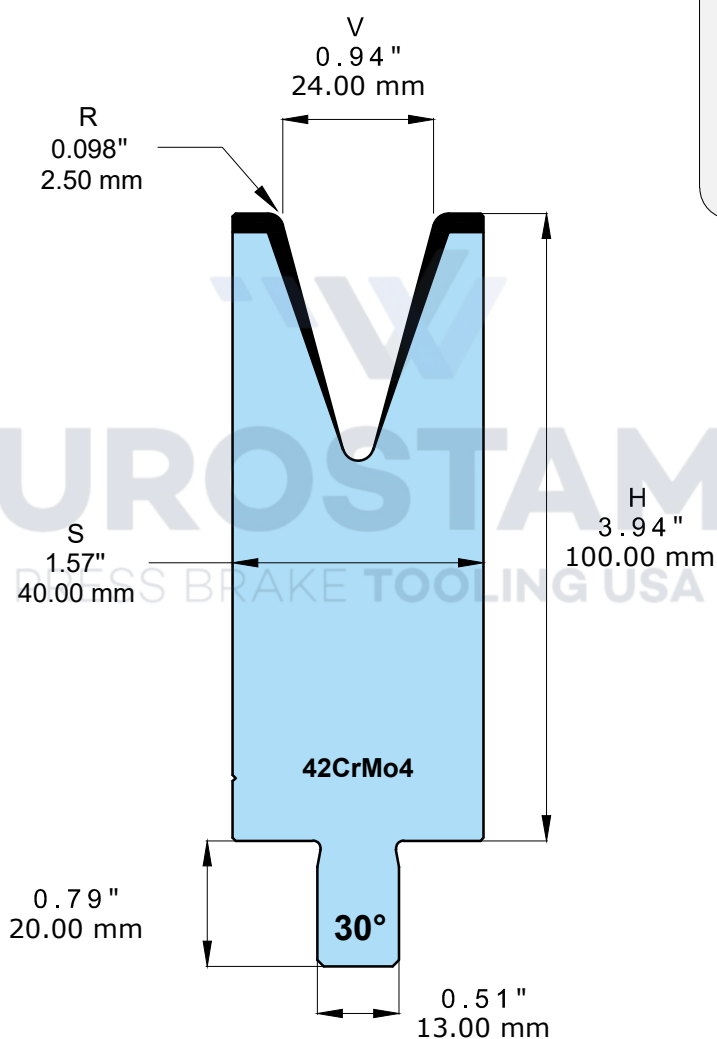

V = 0.94" / 24.00 mm / 30°

332.120.02 - SC2 19.69" / 500 mm 31.75 lbs / 14.40 kg

332.120.02 - SF5 21.65" / 550 mm 35.05 lbs / 15.90 kg