


DTT.100-A30-V30-R3-Cr

H 3.94" - 100.00 mm - **30°**




42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

25.90
TONS / FT

85.00
TONS / M

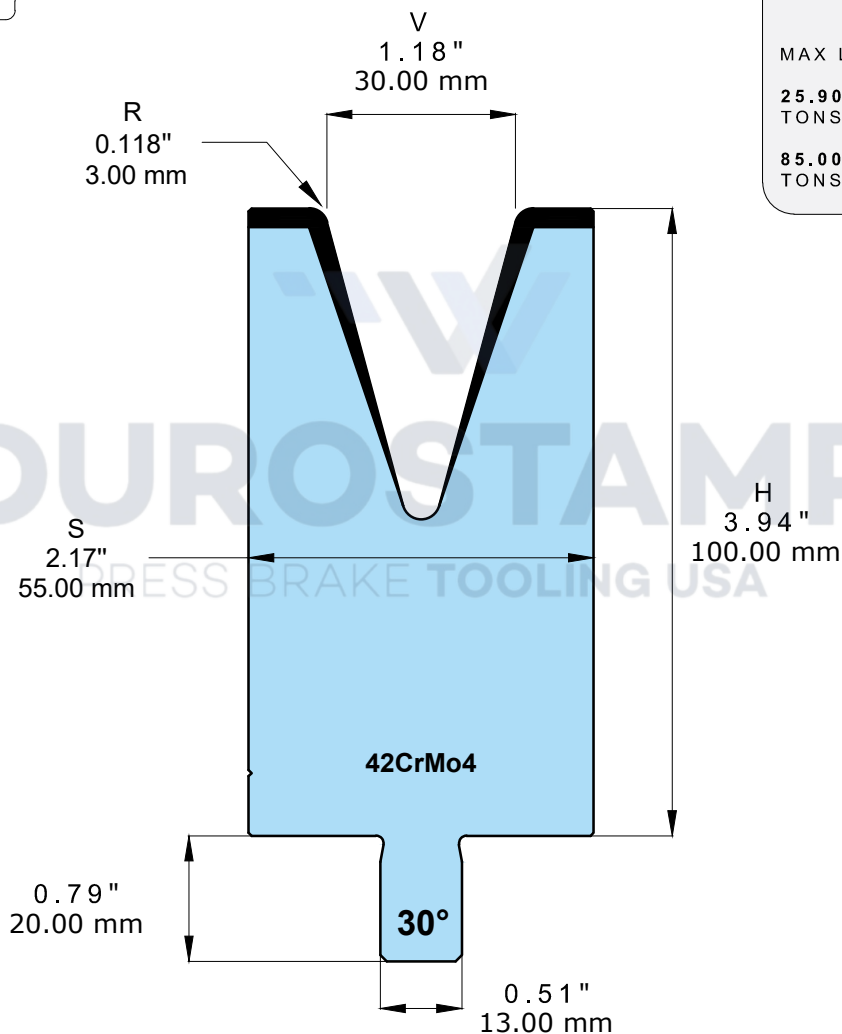

V = 1.18" / 30.00 mm / 30°

332.130.02 - SC2 19.69" / 500 mm 42.11 lbs / 19.10 kg

332.130.02 - SF5 21.65" / 550 mm 46.30 lbs / 21.00 kg