


DTT.100-A30-V40-R5-Cr

H 3.94" - 100.00 mm - **30°**



Type SF5

42CrMo4


**Bonificato
Temperato**

Edge
55-60 HRC

MAX LOAD

22.85
TONS / FT

75.00
TONS / M

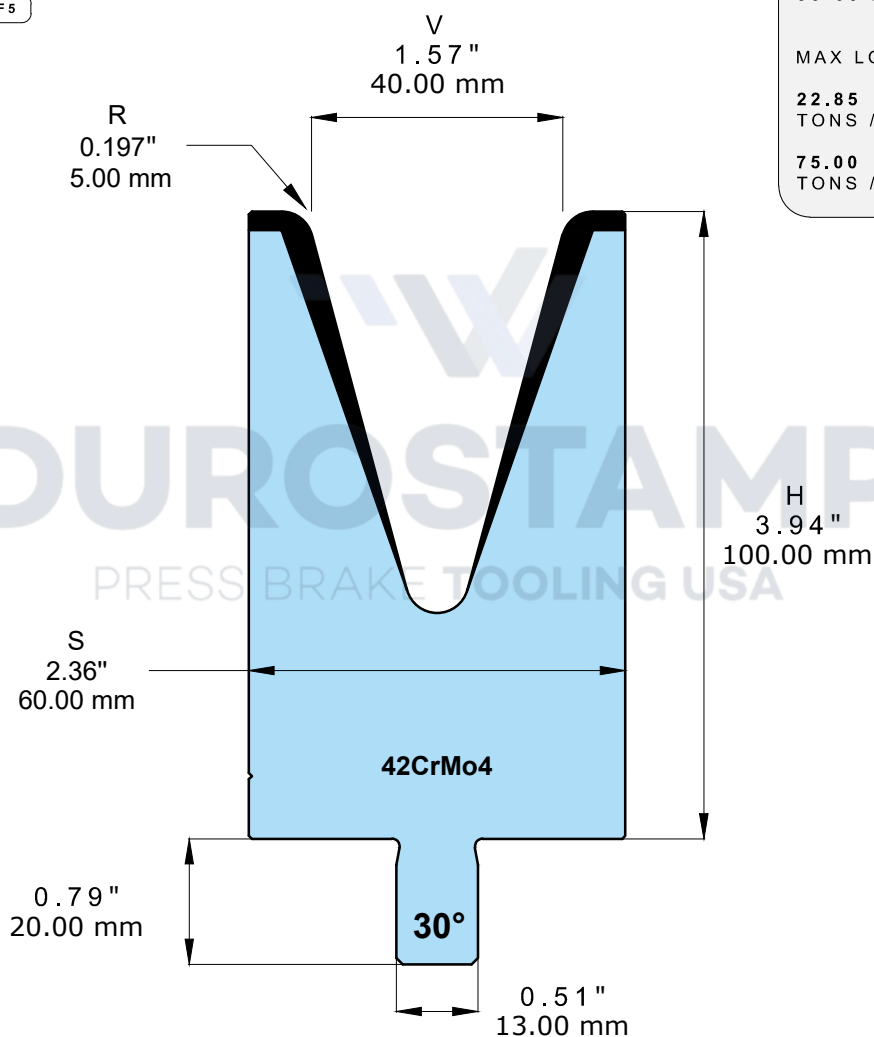

V = 1.57" / 40.00 mm / 30°

332.140.02 - SC2 19.69" / 500 mm 40.34 lbs / 18.30 kg

332.140.02 - SF5 21.65" / 550 mm 44.31 lbs / 20.10 kg