


DTT.100-A30-V50-R5-Cr

H 3.94" - 100.00 mm - **30°**




42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

30.50
TONS / FT

100.00
TONS / M

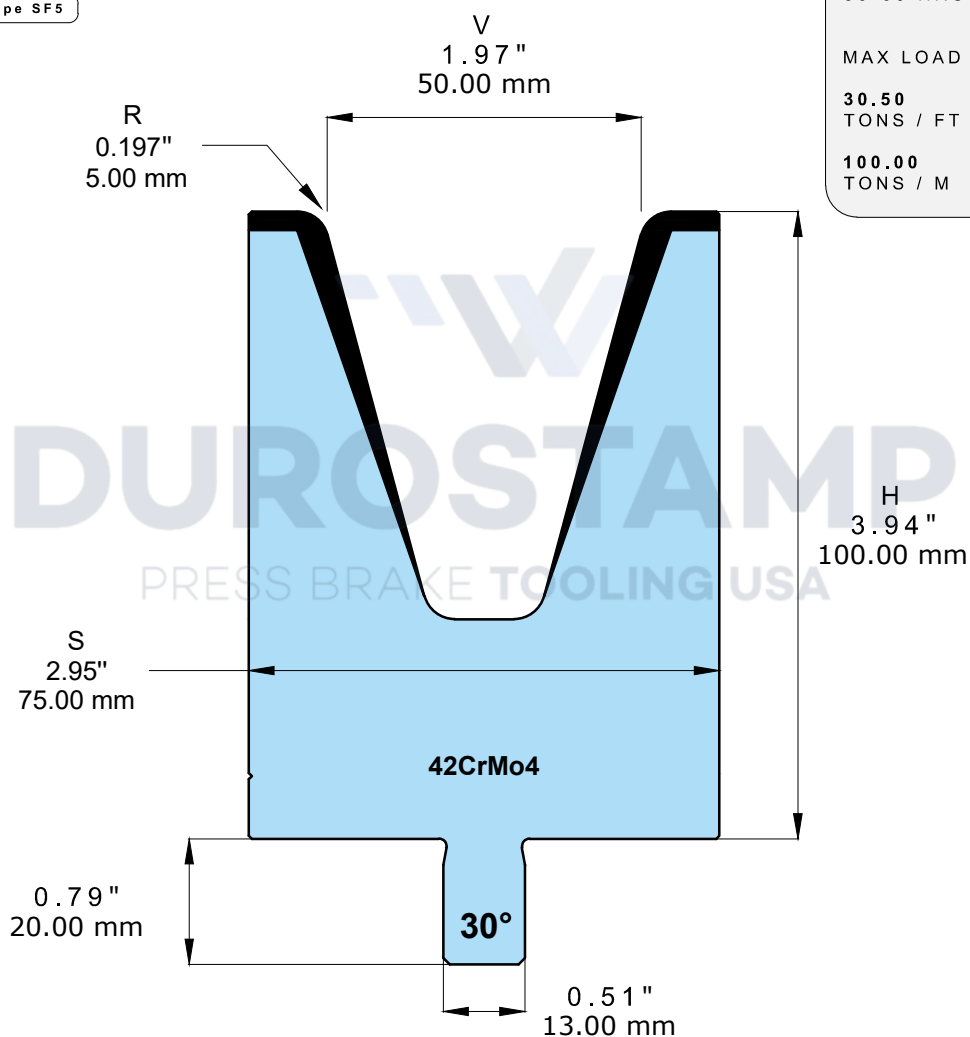

V = 1.97" / 50.00 mm / 30°

332.350.02 - SC2 19.69" / 500 mm 47.62 lbs / 21.60 kg

332.350.02 - SF5 21.65" / 550 mm 52.25 lbs / 23.70 kg