


DTT.100-A30-V6-R3-Cr

H 3.94" - 100.00 mm - **30°**




42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

13.70
TONS / FT

45.00
TONS / M

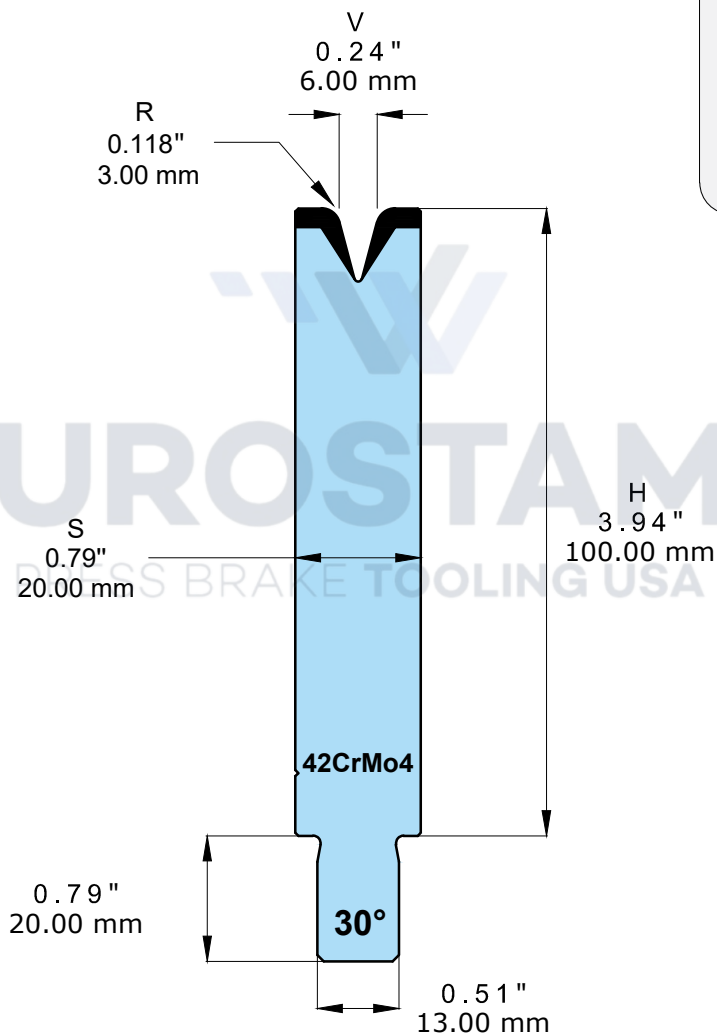

V = 0.24" / 6.00 mm / 30°

332.360.02 - SC2 19.69" / 500 mm 18.96 lbs / 8.60 kg

332.360.02 - SF5 21.65" / 550 mm 20.94 lbs / 9.50 kg