


DTT.100-A30-V10-R3-Cr

H 3.94" - 100.00 mm - **30°**




42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

9.15
TONS / FT

30.00
TONS / M

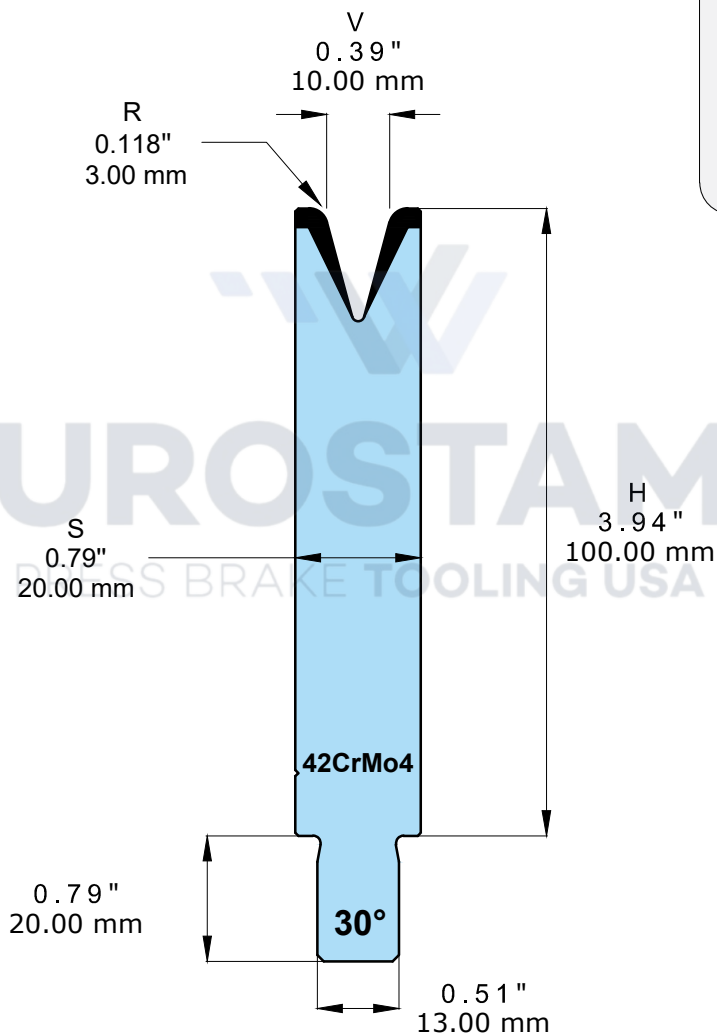

V = 0.39" / 10.00 mm / 30°

332.380.02 - SC2 19.69" / 500 mm 18.52 lbs / 8.40 kg

332.380.02 - SF5 21.65" / 550 mm 20.28 lbs / 9.20 kg