


DTT.100-A30-V12-R3-Cr

H 3.94" - 100.00 mm - **30°**




42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

12.15
TONS / FT

40.00
TONS / M

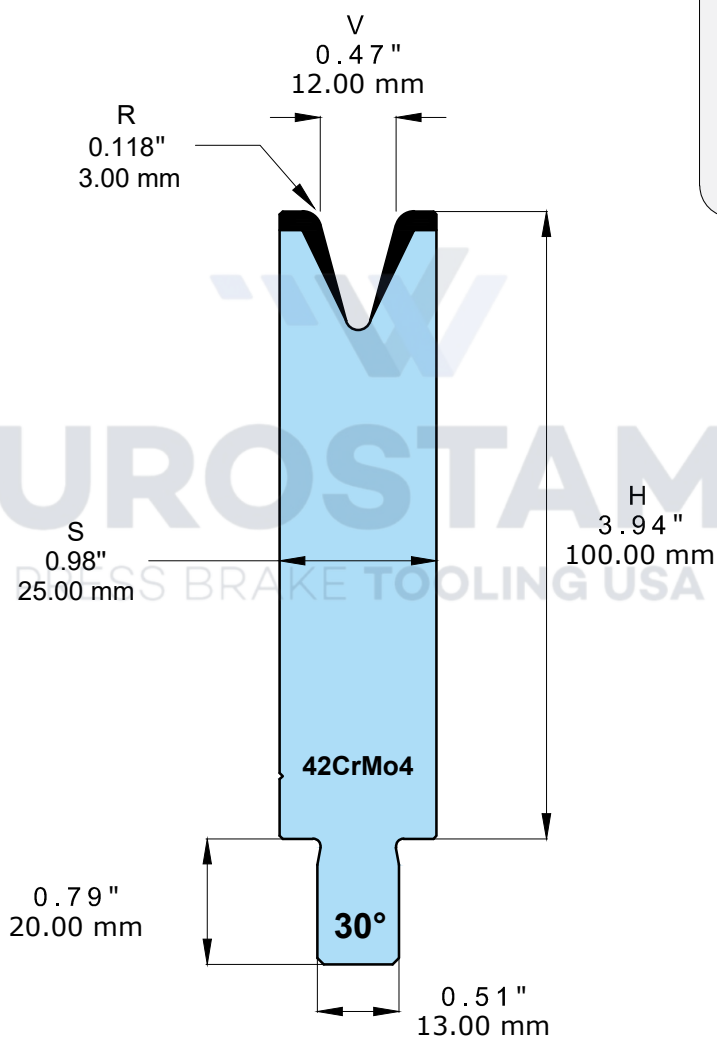

V = 0.47" / 12.00 mm / 30°

332.390.02 - SC2 19.69" / 500 mm 22.49 lbs / 10.20 kg

332.390.02 - SF5 21.65" / 550 mm 24.69 lbs / 11.20 kg