


DTT.100-A30-V16-R3-Cr

H 3.94" - 100.00 mm - **30°**




42CrMo4
Bonificato
Tempered

Edge
55-60 HRC

MAX LOAD

12.15
TONS / FT

40.00
TONS / M

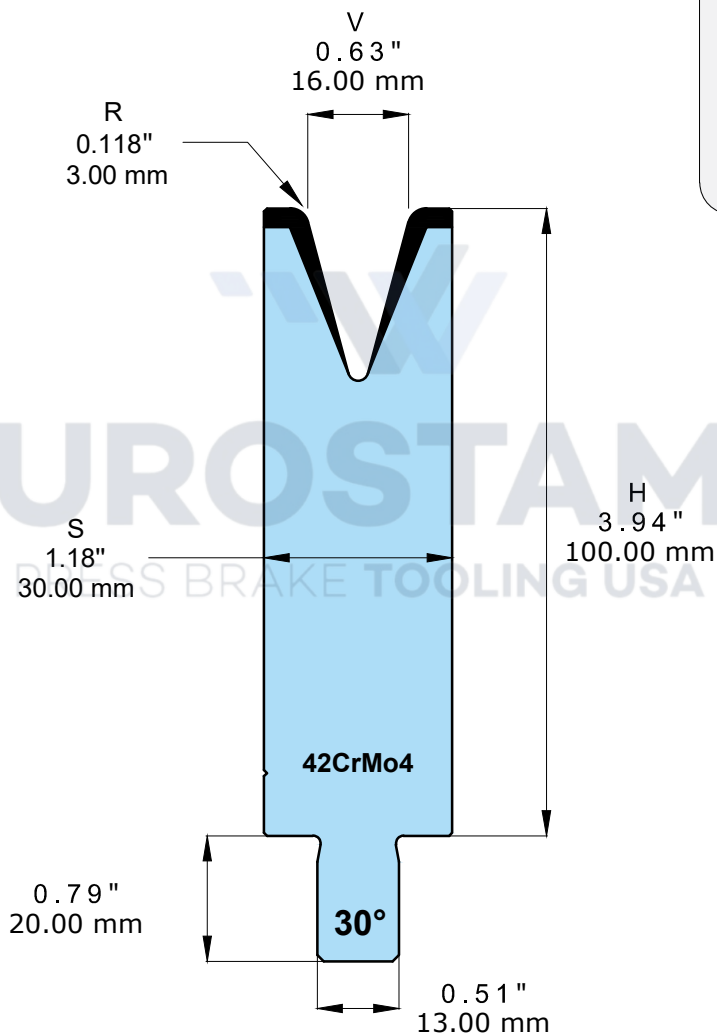

V = 0.63" / 16.00 mm / 30°

332.400.02 - SC2 19.69" / 500 mm 25.79 lbs / 11.70 kg

332.400.02 - SF5 21.65" / 550 mm 28.44 lbs / 12.90 kg